


## Geberit AquaClean 4000, enhancement solution

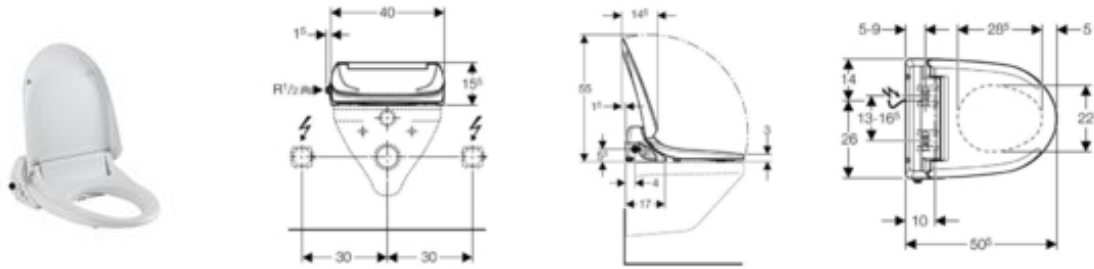

### Application purpose

- For subsequent mounting on a WC ceramic appliance (replaces WC seat and lid)
- For gentle cleaning of the anal area with water
- For convenient toilet use

### Characteristics

- Automatic pre and post rinsing of the spray nozzle with fresh water
- Integrated hot water tank
- Water supply connection on the left side
- WC seat and lid with lowering function
- Spray arm with extendable nozzle for anal area
- Spray intensity adjustable in 5 levels
- Shower spray gradually cools down continuously during shower procedure
- Operating mode of storage water heater adjustable (ON / OFF)
- Most recently used settings are stored automatically
- Mains connection at rear with hidden pipe-laying option to the left or right

### Technical data

Load WC seat / WC lid max.	150	kg
Flow rate anal shower	0.9 - 1.6	l/min
Spray time factory setting	20	s
Number of shower pressure settings	5	
Storage water heater capacity	0.9	l
Length of mains connection cable	2	m
Mains frequency	50 - 60	Hz
Power consumption	800	W
Power consumption standby / with heating element switched on	0.9 / 5.8	W
Protection class	I	
Protection degree	IP x4	
Nominal voltage	230	V AC
Net weight	4.1	kg
Flow pressure range	0.5 - 10	bar
Operating temperature	10 - 40	°C
Storage temperature	-10 - +60	°C
Water temperature factory setting	37	°C

## Scope of delivery

- Water supply connection set for left side connection
- Fastening material
- Compensation pad for toilet seat / appliance
- Spray shield

## Article

Article no.	Colour
146.130.11.1	white alpine

- [240.634.00.1](#) Article no. for UP200 concealed cistern H82
- [240.635.00.1](#) Article no. for UP200 concealed cistern H98