


Geberit lavatory tap type 186, generator, without mixer

NEW

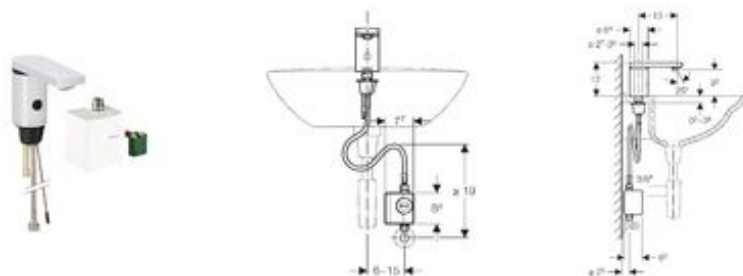

Application purpose

- For cold or mixed water connection
- For extracting tap water
- For the public and semi-public domain
- For installation in washbasin or counter top

Characteristics

- Temperature is not adjustable
- Infrared user detection
- Automatic triggering
- Self-calibrating infrared control
- Vandal-resistant
- Functions can be adjusted and queried with Geberit Service Handy
- Flush actuator can be deactivated by Geberit Clean Handy
- Volume flow control with aerator
- Water saving mode can be set
- Hygienic flush adjustable
- Integrated check valve
- Power supply from generator and rechargeable battery
- Power supply, self-sufficient
- With average 20 uses per day with a duration of 4 s each, the tap is working self-sustainingly

Technical data

Product material	Chrome-plated brass	
Activation distance factory setting	16 - 18	cm
Activation distance adjustment range	1 - 33	cm
Ambient temperature	1 - 40	°C
Operating pressure	2 - 8	bar
Maximum operating temperature water, short-term	90	°C
Flow rate at 3 bar	6	l/min
Max. operating temperature mixed water	45	°C
Battery type	Li-ion (6,6 V)	
Operating voltage	6,6	V DC

Scope of delivery

- Generator unit
- Adapter for angle stop valve G 3/8
- Metal-reinforced hose R 3/8"
- Basket filter
- Key for aerator
- Fastening material

Article

Article no.	Colour
116.336.21.1	bright chrome-plated