




## QTech™

Slab: The light mineral wool  
for medium temperature  
applications



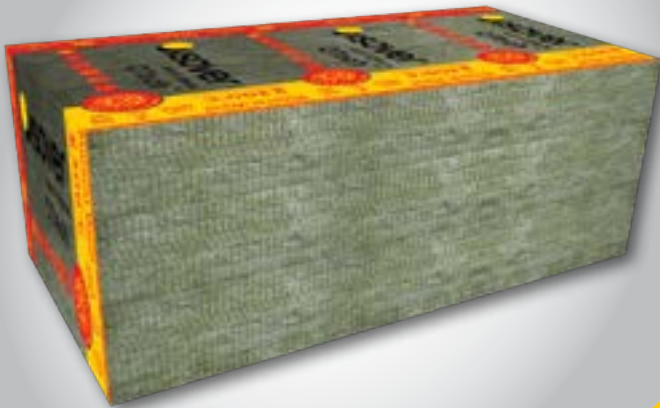

**QTech™ Slab** medium temperature resistant mineral wool slabs/boards.

## TECHNICAL DATA SHEET



**ENERGY SAVING**



**NON-COMBUSTIBLE**



**UNIQUE LIGHTNESS**



**SOUND INSULATION & ABSORPTION**



**EASY TO INSTALL**



**ENVIRONMENTALLY FRIENDLY**

### DESCRIPTION

Resin-bonded, semi-rigid medium temperature resistant light mineral wool slabs/boards.

### APPLICATIONS

Thermal insulation for plants and equipment. Suitable for application on flat or slightly curved surfaces.

### QUALITY MANAGEMENT SYSTEM

Isover products are manufactured according to ISO 9001:2015.

### ENVIRONMENTAL SUSTAINABILITY

Isover products are manufactured according to ISO 14001:2015.

Less material, less energy and less emissions

- Zero ozone depleting potential (ODP)
- Zero global warming potential (GWP)

### FEATURES & BENEFITS

- Mineral wool developed for medium temperature applications in industry
- Excellent thermal properties (thermal conductivity) which reduces heat loss
- Shot free
- Lightweight product, easy to handle and cut

- Good flexibility: can be bent around flat or slightly curved surfaces
- Fast and efficient installation
- Chemically inert and when applied under controlled conditions will not promote or cause corrosion.

## FIRE PROPERTIES

- Non-combustible – tested to SANS 10177 Part 5

## ACOUSTIC PERFORMANCE

QTech™ Slab has effective acoustic performance.

## CORROSIVITY

Does not contribute to corrosion of stainless steel according to ASTM C795/871.

## DURABILITY

## DURABILITY

- Odourless, inert and fully compatible with all standard building materials and components
- Will not promote corrosion of steel, copper or aluminium.
- Will not sustain vermin.
- Will not breed or promote fungi, mould or bacteria.
- Non-hygroscopic.
- Dust settlement will not hamper the products performance
- Dimensionally stable but care must be exercised to limit moisture ingress as this not only compromises the structural integrity but interferes with the thermal resistance properties of the products as well.

## HANDLING & STORAGE

Store product under cover and in dry conditions. Store flat. Handle with care, especially on the edges and corners, which can be damaged if subject to sharp or heavy impact. Do not apply excessive pressure, for example by standing or sitting on the product, as permanent damage may be caused.

## DIMENSIONS

Type	Product Name	Density	Thickness (mm) & Surface weight (kg/m²)				
		kg/m³	25 mm	40 mm*	50 mm	75 mm	100 mm
QTech™	QTech™ Slab	40	1 kg/m²	1.6 kg/m²	2 kg/m²	3 kg/m²	4 kg/m²
Dimensions	Length (mm)		1 200 mm	1 200 mm	1 200 mm	1 200 mm	1 200 mm
	Width (mm)		600 mm	600 mm	600 mm	600 mm	600 mm

\*Made to order item.

## THERMAL CONDUCTIVITY (according to EN 12 667)

	T[°C]	50	100	200	300
QTech™ Slab	[W/(m.K)]	0.0362	0.0441	0.0638	0.0901

## MAXIMUM SERVICE TEMPERATURE (MST) under 100 Pa (according to EN 14 706)

The Maximum Service Temperature according to EN 14 706 is the temperature for which the deformation of the insulation materials is less than 5% under a load of 100 Pa and when exposed to such temperature for a continuous period of 72 hours. This test method is a more stringent evaluation of the highest, permanent operating temperature the product can sustain.



ISOVER is a division of Saint-Gobain  
Construction Products SA (Pty) Ltd

Block A • Siemens Office Park  
• 300 Janadel Avenue • Halfway House  
• Midrand • 1685

PO Box 50416 • Randjesfontein  
• 1683 • South Africa

+27 (0)12 657 2800

[www.isover.co.za](http://www.isover.co.za)



ISOVER reserves the right to alter or amend product specification without notice. The information given in this publication is correct to the best of our knowledge at the time of publication. Whilst Isover will endeavour to ensure publications are up to date, it is the users' responsibility to check with us that it is correct prior to use. For more information, please contact the Technical Department at [saint-gobain.technical@saint-gobain.com](mailto:saint-gobain.technical@saint-gobain.com)

[www.isover.co.za/products/qtechslab](http://www.isover.co.za/products/qtechslab)